

Aladdin Roller Conveyors

10 ft. to 30 ft. options

Models: RC Model Series

Aladdin Temp Rite roller conveyors are the perfect choice when efficient tray assembly is required but a mechanical belt is not desired. The 2" diameter, ball bearing mounted plastic rollers transport the trays easily and quietly from station to station for quick, effortless meal assembly.



Standard Features

- All stainless-steel frame and body construction.
- Adjustable bullet feet
- 15" PVC rollers – 2" diameter with ball bearing mounting
- Rollers mounted in 17" wide x 18" long easily removable sections – no tools required for section removal.
- Equipment supplied is UL and NSF Listed.

Specifications

These conveyors consist of 14 ga, stainless steel long sides with square turned 1" ledge to form a support rail for the roller sections. The rollers are assembled in 18" long removable roller sections for ease of cleaning in low temperature commercial dish washers or standard sinks. The stainless-steel support frame is welded and polished. 1" square tubing cross rails welded to 1-5/8" diameter legs secured to underbracing with 16 ga. stainless steel gussets.

Options


- Point of use electrical raceway – Standard with four 120V or 208V NEMA straight blade or twist lock outlets. Each electrical receptacle is mounted on a connection plate with a circuit breaker and pilot light. All internal wiring ending at an internal power distribution block for one main power source connection.
- Circuit panel design electrical raceway – raceway terminates at load center housed in stainless-steel water-resistant enclosure. Note: Circuit panel raceway load size and number of circuits restricted due to physical panel size.
- Additional outlets
- Outlet upgrade to Pin and Sleeve connection 430P9W (required for Advantage® Plus Activator)
- Mechanical field joints
- Set of 5" Casters, four (4) with brakes, nonadjustable. Conveyor standard height is 34" with casters.
- Open single under shelf along length of conveyor (not available for conveyors with electrical raceway)
- Over Shelf, 18" D x 5ft W, single tier, movable



Aladdin Roller Conveyors

10 ft. to 30 ft. options

Models: RC Model Series

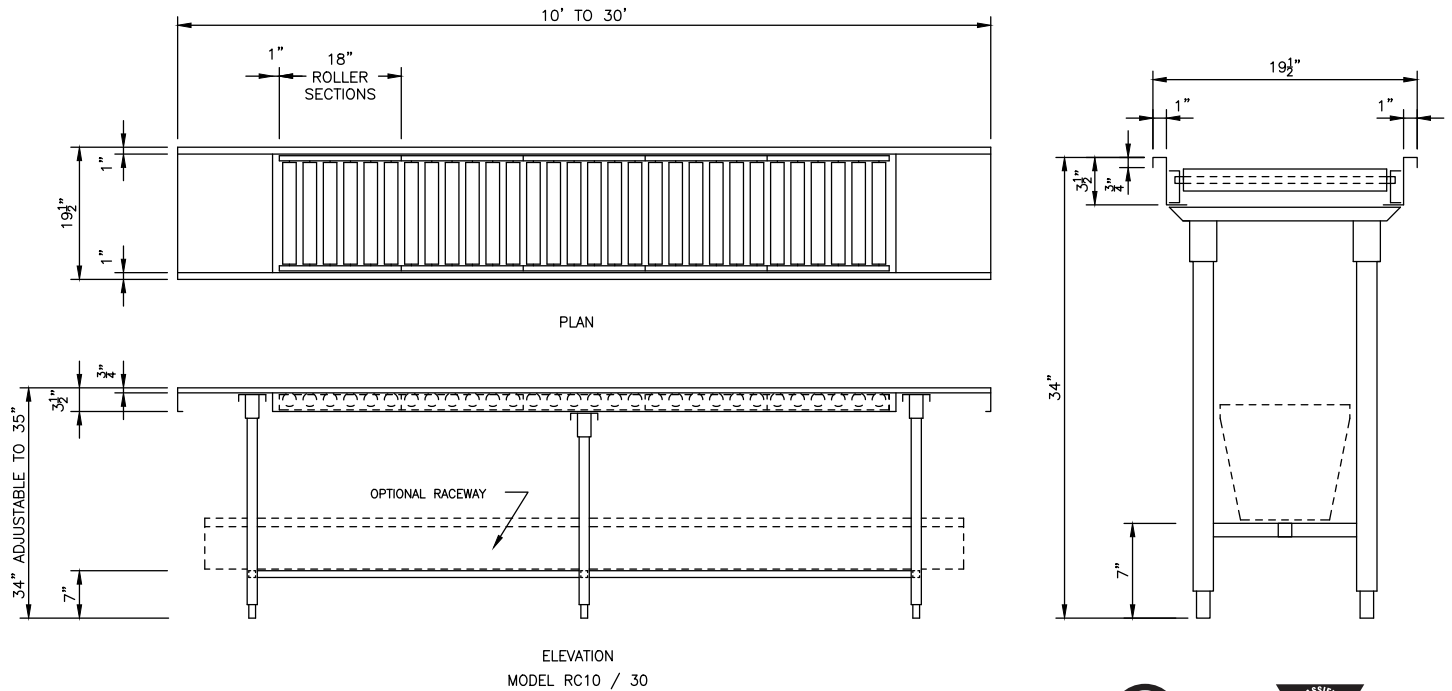

Aladdin Roller Conveyors Technical Dimensions				
Model Number	Width	Height	Length	Shipping Weight
<input type="checkbox"/> RC10	19.5" (49.53 cm)	34" (86.36 cm)	10' (3.1 m)	600 lbs. (272 kg)
<input type="checkbox"/> RC12			12' (3.7 m)	670 lbs. (304 kg)
<input type="checkbox"/> RC14			14' (4.3 m)	740 lbs. (336 kg)
<input type="checkbox"/> RC16			16' (4.9 m)	790 lbs. (358 kg)
<input type="checkbox"/> RC18			18' (5.5 m)	860 lbs. (390 kg)
<input type="checkbox"/> RC20			20' (6.1 m)	920 lbs. (417 kg)
<input type="checkbox"/> RC22			22' (6.7 m)	990 lbs. (449 kg)
<input type="checkbox"/> RC24			24' (7.3 m)	1130 lbs. (513 kg)
<input type="checkbox"/> RC26			26' (7.9 m)	1200 lbs. (544 kg)
<input type="checkbox"/> RC28			28' (8.5 m)	1260 lbs. (571 kg)
<input type="checkbox"/> RC30			30' (9.1 m)	1340 lbs. (608 kg)

Visit aladdintemprite.com/patents for patent information.

250 E. Main St. | Hendersonville, TN 37075 | Customer Service: 800.888.8018 | Tech Service: 800.888.5426 | Fax: 888.812.9956 | aladdintemprite.com

©2023 Aladdin Temp-Rite.® All rights reserved. Note: Specifications are subject to change without notice.



S211221RC10-30

an Ali Group Company



The Spirit of Excellence