

Stainless Steel Tray Carts

SCS Model Series: 2 Trays Per Shelf

Aladdin's SCS Series carts are the smart choice for patient meal delivery and tray retrieval. Their bold, contemporary look is as stylish as it is functional.

Inside, welded stainless steel tube framing gives these carts an enhanced core strength that also dampens noise for a quiet-rolling cart.

Their lightweight and ergonomic design makes our SC Series carts easy for employees to maneuver *quickly and quietly* through busy kitchens, tight elevators and crowded hallways. Low-profile models are easy to see over and offer a convenient top work surface.

SCS Series carts have adjustable tray ladders that fit these popular tray sizes:

- 14" x 18" (36 cm x 46 cm) trays.
- 15" x 20" (38 cm x 51 cm) standard cafeteria trays.
- 15" x 20" (38 cm x 51 cm) Aladdin Room Service trays (RST1).
- Non-Aladdin Room Service tray sizes:¹
 - 15" x 20" (38 cm x 51 cm)
 - 15" x 21.5" (38 cm x 55 cm)
 - 15.5" x 21.5" (39 cm x 55 cm)
- **Advanced Meal Systems, including:**
 - Convect-Rite® trays: 13.4" x 22" (34 cm x 56 cm)
 - Convect-Rite® divided trays: 12.8" x 20.9" (33 cm x 53 cm)
 - Temp-Rite® II Excel®: 12.7" x 21.4" (32 cm x 54 cm)
- Century I insulated trays.

Available Options:

- Refer to chart on back page.

SC Carts: The smart choice - only from Aladdin!



SC12S-525DPR Low-Profile Model with PR Upgrade Package shown

PATENTED

New Accessory!
On-Board Beverage Caddy
Only from Aladdin!



SC16S-525 Model with Beverage and Condiment Caddy shown



Optional Configurations Include:

- Two trays per shelf.
- 10-30 tray capacities:
 - **5.25" (13.3 cm) tray spacing model capacities:** 10, 12, 14, 16 or 20 trays
 - **4.5" (11.4 cm) tray spacing model capacities:** 14, 16, 20 or 24 trays
 - **3.5" (8.9 cm) tray spacing model capacities:** 20, 24, 26 or 30 trays

Every Aladdin SC Stainless Steel Cart Has These Great Standard Features!

- | | |
|--|---|
| <ul style="list-style-type: none"> • Interior stainless steel welded tube framing increases core strength and reduces cart noise. • Polymer door bumpers and stainless steel tray ladders with plastic inserts add to the overall quiet transport of meals to patient floors. • Contemporary door design with full-length door handle is great for any height employee. • Round stainless steel push handle(s) for easy transport. • Easily removable tray ladders make cleaning easy (no tools required). • Floor drain with metal stopper. | <ul style="list-style-type: none"> • Non-marking corner bumpers protect walls and surfaces. • 2" wide stainless steel tray slides provides secure tray transport (ladder-style ledge panels). • Full 270° door swing gives unobstructed access during loading and unloading of trays. • Magnetic catches hold doors tightly against the cart tank to reduce vibration noise during transport. • Four 5" casters; two fixed and two swivel, with brakes. • Transport and vibration tested to IEC 60068-2-64. |
|--|---|

¹**Note:** To ensure non-Aladdin trays fit properly, we recommend that you provide a tray sample to your Territory Manager for testing prior to ordering carts.

Stainless Steel Tray Carts

SCS Model Series: 2 Trays Per Shelf




Low-Profile Model Features Include:

- Shorter profile is easy to see over.
- Round stainless steel push handles make maneuvering easy!
- Flat stainless steel top doubles as work surface.

Optional PR Upgrade Package Includes:

- Two-door "pass-through" design.
- Top rail.

**SCS Models hold
2 trays per shelf**

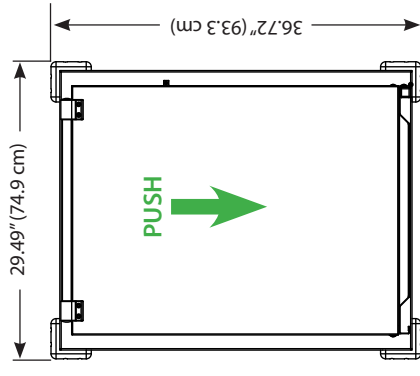

Model SC12S-525DPR with DPR Upgrade Package shown



Rev. B S220804SCS

Base Model Number	Tray Capacity ¹	Tray Spacing ²	Length	Width (Door Clearance)	Height	PR Upgrade Option ³ (-PR)	All-Swivel Casters (-S)	Tow Hitch Option (-T)	Beverage Caddy Accessory ⁴	Net Weight
Side-Loaded Tray Cart Models: Trays are placed (loaded) into cart LONGEST-SIDE FIRST										
<input type="checkbox"/> SC10S-525D Low-Profile ⁵	10				44.93" (114.1 cm)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A	155 lbs. (70 kg)
<input type="checkbox"/> SC12S-525D Low-Profile ⁵	12	5.25" (13.3 cm)	36.72" (93.2 cm)	29.49" (74.9 cm)	44.93" (114.1 cm)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A	156 lbs. (71 kg)
<input type="checkbox"/> SC16S-525D	16				55" (139.7 cm)	N/A	N/A	<input type="checkbox"/>	<input type="checkbox"/>	183 lbs. (83 kg)
<input type="checkbox"/> SC20S-525D	20				63.5" (161.3 cm)	N/A	N/A	<input type="checkbox"/>	<input type="checkbox"/>	205 lbs. (93 kg)
<hr/>										
<input type="checkbox"/> SC14S-450D Low-Profile ⁵	14	4.50" (11.4 cm)	36.72" (93.2 cm)	29.49" (74.9 cm)	44.93" (114.1 cm)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	N/A	158 lbs. (72 kg)
<input type="checkbox"/> SC24S-450D	24				63.5" (161.3 cm)	N/A	N/A	<input type="checkbox"/>	<input type="checkbox"/>	209 lbs. (95 kg)
<hr/>										
<input type="checkbox"/> SC20S-350DPR ²	20	3.50" (8.9 cm)	36.72" (93.2 cm)	29.49" (74.9 cm)	47" (119.4 cm)	Std	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	171 lbs. (78 kg)
<input type="checkbox"/> SC30S-350D ²	30				63.5" (161.3 cm)	N/A	N/A	<input type="checkbox"/>	<input type="checkbox"/>	215 lbs. (98 kg)

¹Trays are placed on (loaded) onto cart with LONGEST side first; two trays per level.
²Carts with 3.50" (8.9 cm) tray spacing are primarily used for Advanced Meal System trays that require less clearance.
³PR Upgrade package includes; Two-door "pass-through" design and top rail (in lieu of handle). Cart height is increased by 0.42" (1 cm).

⁴Aladdin's Beverage Caddy was created exclusively to mount on Aladdin SC carts only, and is PATENTED. It is not recommended for use on low-profile carts due to height. When mounted to these carts, Caddy extends 6" (15 cm) past the cart bumper system.
⁵Low-Profile models have a round, stainless steel push handle mounted on cart top. All other models feature two long push/pull handles located on the back of the cart.

Visit aladintemprite.com for patent information.
 250 E. Main St. | Hendersonville, TN 37075 | Customer Service: 800.888.8018 | Tech Service: 800.888.5426 | Fax: 888.812.9956 | aladintemprite.com
 ©2023 Aladdin Temp-Rite®. All rights reserved. Note: Specifications are subject to change without notice.

an Ali Group Company



The Spirit of Excellence